



PRODUCT STRUCTURE

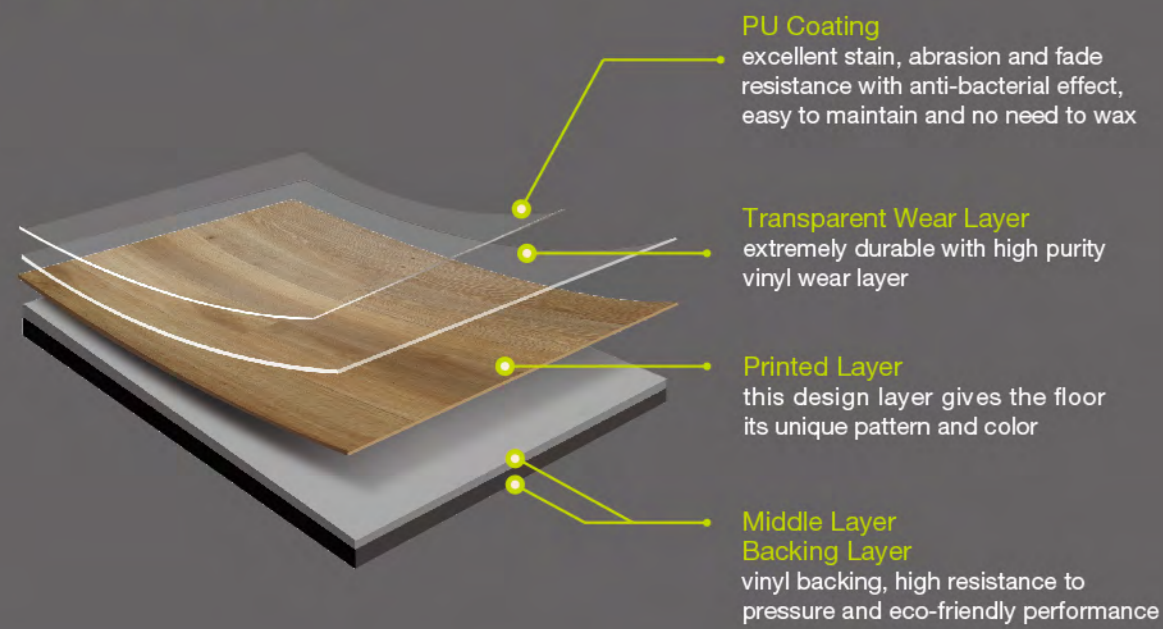


The thickness of NOVALIC wear layer is 0.3mm without microbevel (side view)

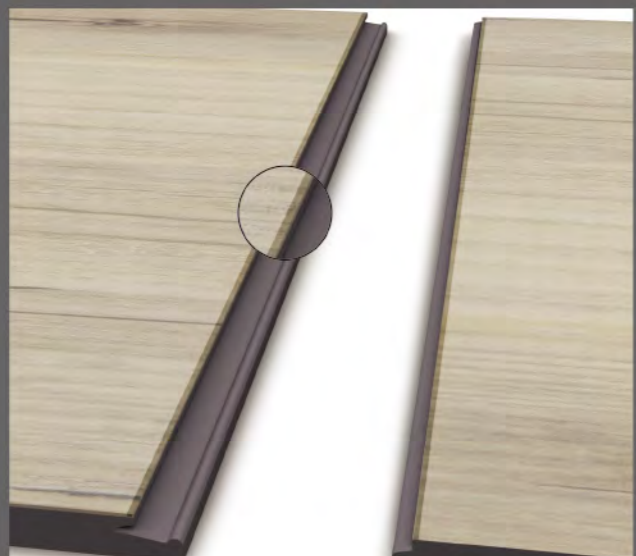

The thickness of NOVALIC wear layer is 0.55mm with microbevel (side view)



BEFORE installation

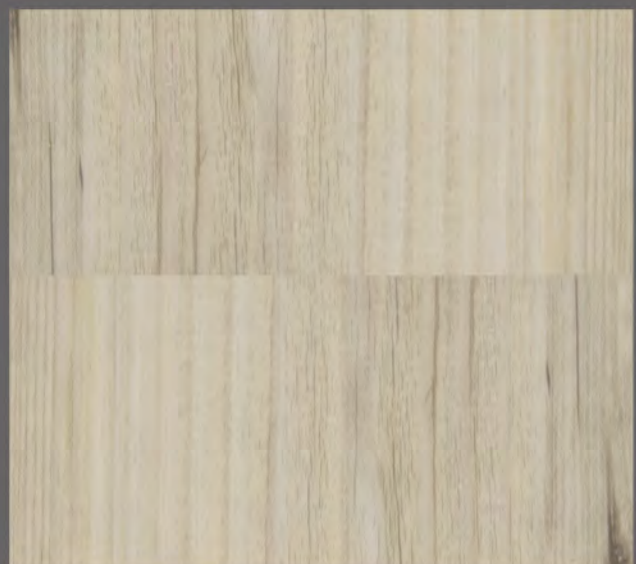

AFTER installation



FRESH

NOVALIS
INNOVATIVE FLOORING




Partner



www.novalis-intl.com



CHARACTERISTICS	TEST METHOD	FRESH
Luxury Vinyl Tile	EN 649	Heterogeneous PVC
Lacquering PU		Particle PU Lacquer
Weight	EN 430	ca.4315 g/m ²
Thickness	EN 428	2.5 mm
Wear layer	EN 429	0.5 mm
Classification	EN 685	33_42
Fire Classification	EN 13501	Bfl-s1
Slip Resistance	DIN 51130 EN 13893	R9 DS
Weargroup	EN 649	T
Residual Indentation	EN 433	<0.1 mm
Thermal Conductivity	DIN 52612	0.02 m ² k/w
Electrical Conductivity	EN 1081	app 10 ¹¹ Ohm
Castor Chair	EN 425	Yes, Type W
Floor Heating		Yes, max.27°
Colourfastness	ISO 105-B02	m>6 Grade



NOVALIS
INNOVATIVE FLOORING



Fresh

12" x 24" (305mm x 610mm)




Lemon

FS001



Tangerine

FS002

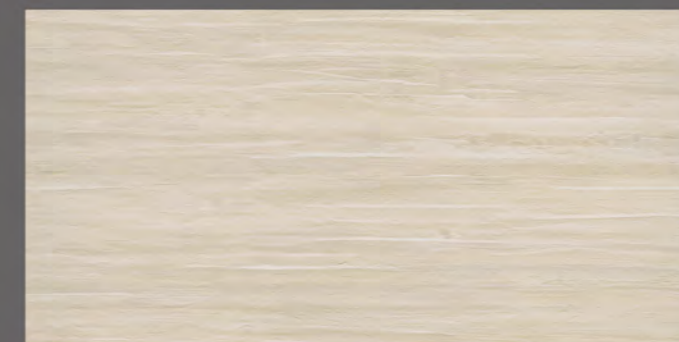

Sand

FS009



Pecan

FS010




Pomegranate

FS003



Turquoise

FS004

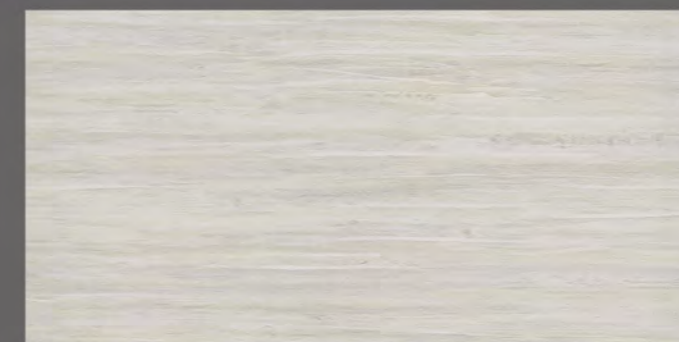

Seashell

FS011



Graphite

FS012




Ocean

FS005



Seafoam

FS006

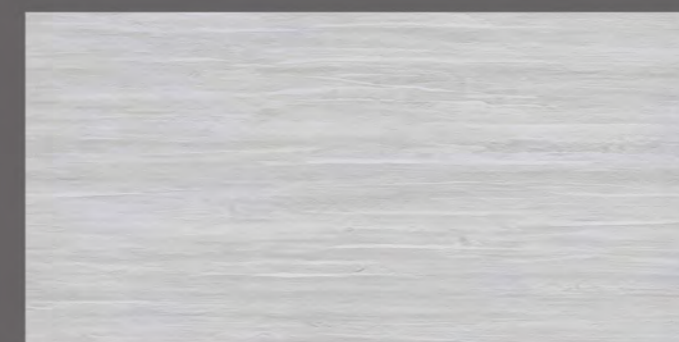

Haze

FS013



Iron

FS014



Lime

FS007



Fudge

FS008



Titanium

FS015



Coal

FS016

