




PRODUCT STRUCTURE



- 1 AMP Coating**
antimicrobial, increased scratch and scuff resistance, excellent stain and fade resistance, easy to maintain and no need to wax
- 2 Transparent Wear Layer**
extremely durable with high purity vinyl wear layer
- 3 Printed Wear Layer**
this design layer gives the floor its unique pattern and color
- 4 Backing Layer**
vinyl backing, high resistance to pressure and eco-friendly performance
- 5 Extruded Vinyl Core**
high performance waterproof core that improves rigidity and overall stability of the product
- 6 Pre-attached Cork Underlayment**
improves acoustical performance and increases comfort underfoot

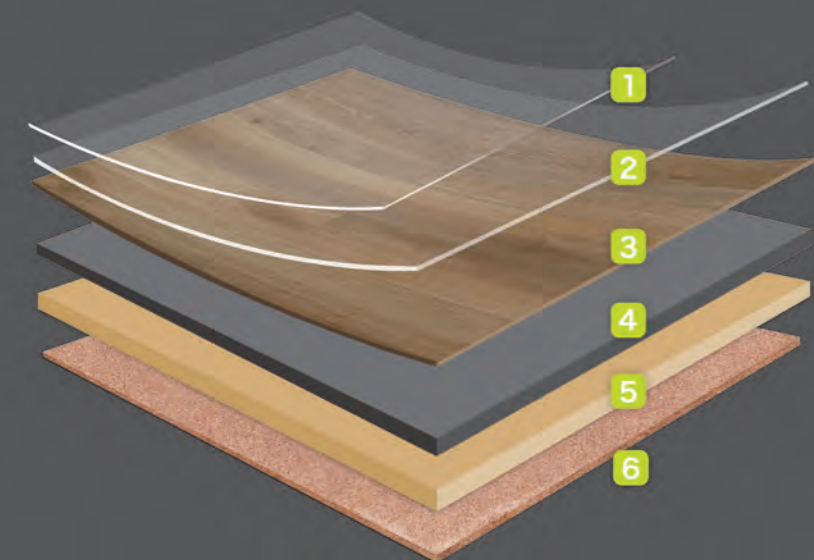

12

SIMPLE
SIMPLE
SIMPLE

SIMPLE



CHARACTERISTICS	STANDARD	SIMPLE
Luxury Vinyl Tile	EN ISO 10582	Heterogeneous PVC
Lacquering PU		Particle PU Lacquer
Weight	EN ISO 23997	ca.8716 g/m²
Thickness	EN ISO 24346	6.5 mm(nominal)
Wear Layer	EN ISO 24340	0.55 mm
Classification	EN ISO 10874 ISO 24340	23,33,42 I
Fire Classification	EN 13501-1	Bfl-S1
Slip Resistance	DIN 51130	R9 DS
Weargroup	EN 649	T
Residual Indentation	EN ISO 24343-1	<0.1 mm
Thermal Conductivity	DIN 52612	0.02 m² k/w
Electrostatic Behaviour	EN 1815	-0.2 kV
Castor Chair	EN ISO 4918	Yes, Type W
Floor Heating		Yes,max.27C°
Colourfastness	ISO 105-B02	m>6 Grade
Dimensional Stability	EN ISO 23999	≤0.25%

NOVALIS
INNOVATIVE FLOORING



Partner



www.novalis-intl.com

NOVALIS
INNOVATIVE FLOORING






6" x 48" (152mm x 1220mm)



Alpine Oak Fog

AO002H

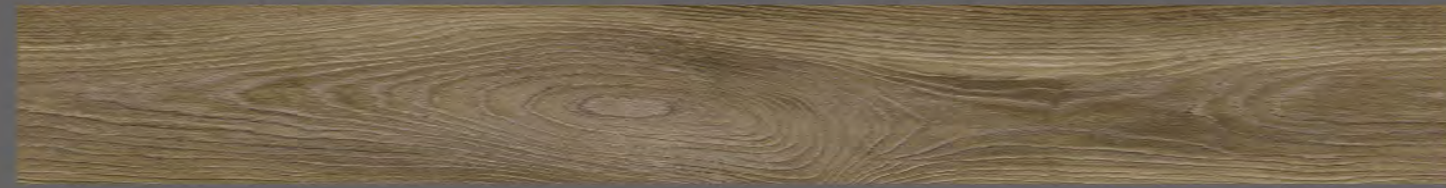


Alpine Oak Khaki

AO005H



Tuscany Oak Snow

TO001H

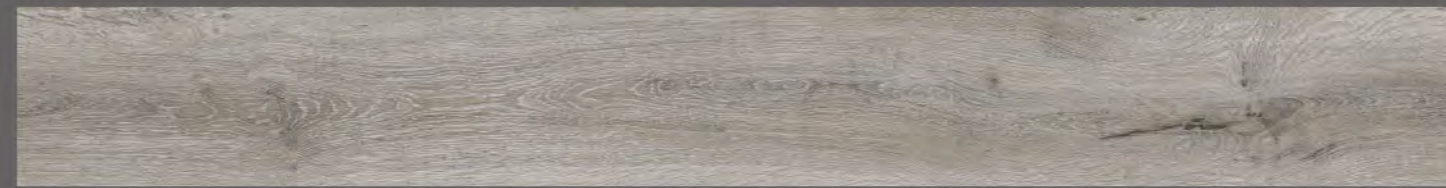


Tuscany Oak Mist

TO002H



Tuscany Oak Steel

TO005H

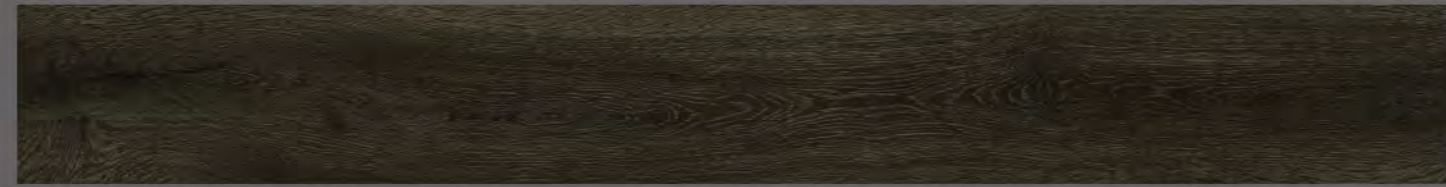

Tuscany Oak Wenge


TO006H

6" x 48" (152mm x 1220mm)



Baltic Oak Taupe

BO002H

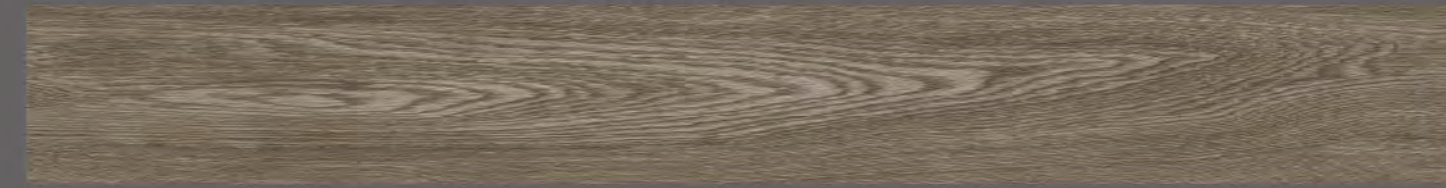

Baltic Oak Suede

BO003H



Carolina Oak Natural

CO001H




Carolina Oak Honey

CO002H



Carolina Oak Gunstock

CO004H

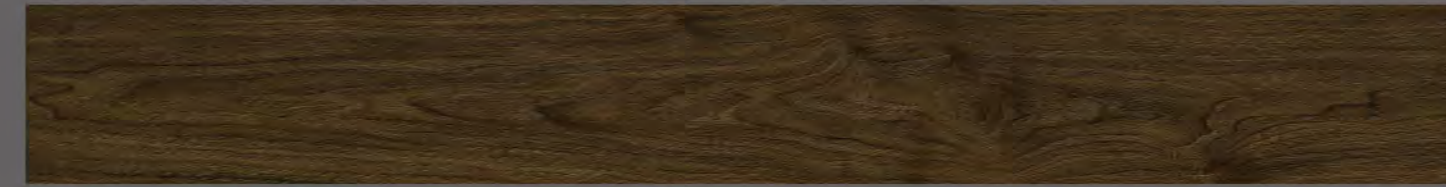

European Walnut Chocolate

EW001H

